




SPECIFICATION	LW
CYLINDERS	1
BORE X STROKE (mm)	86 x 75
DISPLACEMENT (L / ci)	0.43 / 26.54
GROSS POWER hp (kw)	9.3 (6.8)
RATED SPEED (rpm)	3600
LENGTH (in/mm)	16.8 / 429
WIDTH (in/mm)	18.5 / 472
HEIGHT (in/mm)	19.4 / 494
DRY WEIGHT ELECTRIC START (LBS/KG)	~118 / 54
DRY WEIGHT RECOIL START (LBS/KG)	~107 / 49
COMBUSTION TYPE	Direct Injection
ASPIRATION	Natural Aspiration
GOVERNOR TYPE	Mechanical

PERFORMANCE CURVES L100W6

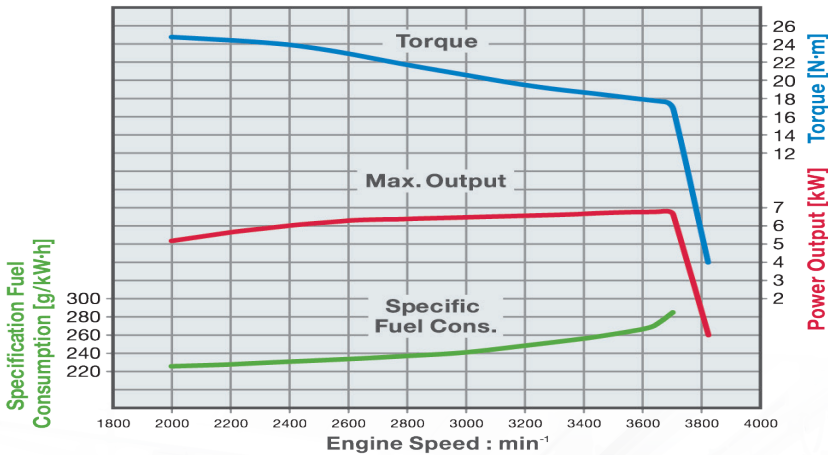

KEY FEATURES

- Dimensionally a drop-fit replacement for YANMAR LN & LV Series Engines.
- Reduces exhaust emissions using Diesel Oxidation Catalyst.
- Lightweight, compact solution to power many applications
- Variable speed engine meeting EPA Tier IV Final
- Samples and mass production are available now.



Pure. Reliable. Power.